


Item Image




Wiring



Dimensions

**Hamilton®**

1 GANG 45A DOUBLE POLE  
RED ROCKER SWITCH

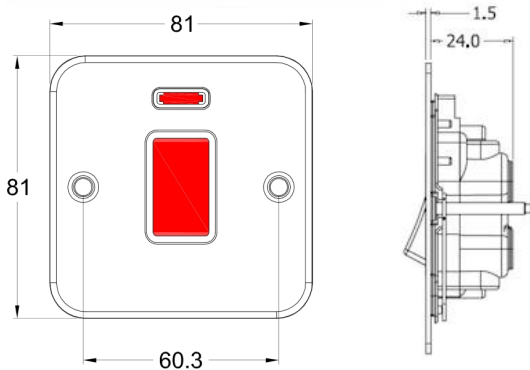

## MC45NW

Metal Clad steel 1 gang 45 Amp Double Pole Switch Outlet. Standard switch insert will be Red with a White surround and a Red Neon. This accessory must be installed using the supplied 40mm deep Metal Clad back box.

Primary Range	Metal Clad
Insert Type	Double Pole Rocker Switch with Neon
Plate Finish	Steel
Frame Finish	
Switch Colour	Red
Body & Switch Trim	White with Red Neon
Height	Single = 81mm
Width	Single = 81mm
Depth	Single = 42mm (When fitted to supplied Metal Clad back box)
Fixing Hole Centres	Box Fixing = 60.3mm
Minimum Wall Box Depth	40mm
Wattage	
Switched Poles	Double
Current Rating	45Amp
Voltage	220/250V AC
Max load	45 Amp
Contact Gap Minimum	3mm
Terminal Capacity 1	3 x 6mm <sup>2</sup>
Terminal Capacity 2	2 x 10mm <sup>2</sup>
Terminal Capacity 3	1 x 16mm <sup>2</sup>
Terminal Capacity 4	
Terminal Capacity 5	
Earth Terminal Capacity 1	6 x 1mm <sup>2</sup>
Earth Terminal Capacity 2	5 x 1.5mm <sup>2</sup>
Earth Terminal Capacity 3	3 x 2.5mm <sup>2</sup>
Earth Terminal Capacity 4	2 x 4mm <sup>2</sup> Multi-Strand
Earth Terminal Capacity 5	1 x 6mm <sup>2</sup>
Product Class 1	Must be earthed
Ambient Operating Temperature	-5° to +40° C
Recommended Location	Indoor use only
Cable outlet (min)	6mm <sup>2</sup>
Cable outlet (max)	12.5mm <sup>2</sup>
Standard/Approval	BS 1363

All products listed conform to current British or European standards and the product information is correct at the time of going to press.

All accessories are manufactured under an accredited BS EN ISO 9001 : 2008 Quality Management System.

It is the policy of the company to continually improve products as part of our development programme. Therefore, we reserve the right to alter designs and dimensions without prior notice.

Illustrations and diagrams are reproduced within the limitations of reproductions and printing processes are not binding.

Due to manufacturing processes we cannot guarantee an exact colour match and shadings of certain finishes.

Correct as at May 2015  
E&OE

R Hamilton & Co Ltd • Quarry Industrial Estate • Mere • Wiltshire • BA12 6LA • UK  
T: +44 (0)1747 860088 • F: +44 (0)1747 861032 • E: info@hamilton-litestat.com  
www.hamilton-litestat.com

Directors: R Hamilton • I Hamilton • RL Haines • CP Savory • J Berry • AMH Hamilton (Secretary)  
Registered Office: 78 Tenter Road • Moulton Park • Northampton • NN3 6AX  
Registered in London No. 941624 • VAT Registration No. 222 6607 84

