


Item Image



Wiring

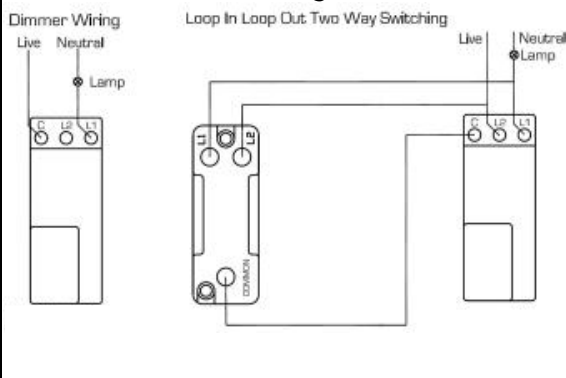

**Note:**

When switching from more than one position a two way dimmer can only be used in conjunction with switches, i.e. only one dimmer per circuit.

When using as a One Way Dimmer the L2 terminal is not used.

## VWP 4X40

Vogue White Push On/Off Dimmer 4 gang 2 way 400W max 40W min. Standard Insert will be Vogue White. A tough, scratch resistant finish with inherent antimicrobial properties.

Primary Range	Vogue White
Insert Type	Leading Edge Resistive Dimmers
Plate Finish	Vogue White moulded high-grade thermoset plastic
Dimmer Knob Shell Finish	Vogue White
Switch Colour	Vogue White
Body & Switch Trim	
Height	Double = 86mm
Width	Double = 146mm
Depth	Double = 6.8mm
Fixing Hole Centres	Box Fixing = 120.6mm
Minimum Wall Box Depth	35mm
Wattage	300W per gang
Switched Poles	Single
Current Rating	1.25 Amps per gang
Voltage	220/250V AC
Max load	300W resistive per gang
Contact Gap Minimum	N/A
Terminal Capacity 1	2 x 1mm <sup>2</sup>
Terminal Capacity 2	2 x 1.5mm <sup>2</sup>
Terminal Capacity 3	
Terminal Capacity 4	
Terminal Capacity 5	
Earth Terminal Capacity 1	5 x 1mm <sup>2</sup>
Earth Terminal Capacity 2	4 x 1.5mm <sup>2</sup>
Earth Terminal Capacity 3	3 x 2.5mm <sup>2</sup>
Earth Terminal Capacity 4	1 x 4mm <sup>2</sup> Multi-Strand
Earth Terminal Capacity 5	1 x 6mm <sup>2</sup>
Product Class 1	Face plate must be earthed
Ambient Operating Temperature	-5° to +40° C
Recommended Location	Indoor use only
Standard/Approval	BS EN 60669-2-1

**Additional Features:**

Inline terminals.  
Screw caps supplied to conceal the fixing screws.

All products listed conform to current British or European standards and the product information is correct at the time of going to press.	All accessories are manufactured under an accredited BS EN ISO 9001 : 2008 Quality Management System.	It is the policy of the company to continually improve products as part of our development programme. Therefore, we reserve the right to alter designs and dimensions without prior notice.
Illustrations and diagrams are reproduced within the limitations of reproductions and printing processes are not binding.	Due to manufacturing processes we cannot guarantee an exact colour match and shadings of certain finishes.	Correct as at May 2015 E&OE

R Hamilton & Co Ltd • Quarry Industrial Estate • Mere • Wiltshire • BA12 6LA • UK  
T: +44 (0)1747 860088 • F: +44 (0)1747 861032 • E: info@hamilton-litestat.com  
www.hamilton-litestat.com

Directors: R Hamilton • I Hamilton • RL Haines • CP Savory • J Berry • AMH Hamilton (Secretary)  
Registered Office: 78 Tenter Road • Moulton Park • Northampton • NN3 6AX  
Registered in London No. 941624 • VAT Registration No. 222 6607 84

(VWP4x40 - Vogue White Push On/Off Dimmer 4 gang 2 way 400W max 40W min. Standard Insert will be Vogue White.)

